



CellAdvisor™

JD745B Base Station Analyzer Specifications

Spectrum Analyzer (standard)

Frequency

Frequency range	100 kHz to 4 GHz
-----------------	------------------

Internal 10 MHz Frequency Reference

Accuracy	$\pm 0.05 \text{ ppm} + \text{aging}$ (0 to 50°C)
Aging	$\pm 0.5 \text{ ppm/year}$

Frequency Span

Range	0 Hz (zero span) 10 Hz to 4 GHz
-------	------------------------------------

Resolution

Resolution	1 Hz
------------	------

Resolution Bandwidth (RBW)

-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	$\pm 10\%$ (nominal)	

Video Bandwidth (VBW)

-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	$\pm 10\%$ (nominal)	

Single Sideband (SSB) Phase Noise

Fc 1 GHz, RBW 10 kHz, VBW 1 kHz, RMS detector

Carrier Offset

30 kHz	<-90 dBc/Hz (typical)
100 kHz	<-95 dBc/Hz (typical)
1 MHz	<-102 dBc/Hz (typical)

Measurement Range

DANL to +20 dBm

Input attenuator range	0 to 50 dB, 5 dB steps
------------------------	------------------------

Maximum Input Level

Average continuous power	+20 dBm
DC voltage	$\pm 50 \text{ VDC}$

Spectrum Analyzer: 100 kHz to 4 GHz

Cable and Antenna Analyzer: 5 MHz to 4 GHz

Power Meter: 10 MHz to 4 GHz

Specification Conditions

JD745B specifications apply under these conditions:

- The instrument has been turned on for at least 15 minutes
- The instrument is operating within a valid calibration period
- Data with no tolerance are considered typical values
- Cable and antenna measurements apply after calibration to the OSL standard
- Typical and nominal values are defined as:
 - Typical: expected performance of the instrument operating at 20 to 30°C after being at this temperature for 15 minutes
 - Nominal: a general, descriptive term or parameter

Displayed Average Noise Level (DANL)				
1 Hz RBW, 1 Hz VBW, 50 Ω termination, 0 dB attenuation, RMS detector				
Preamplifier Off				
10 MHz to 2.3 GHz	-140 dBm (-146 dBm, typical)			
>2.3 GHz to 3 GHz	-138 dBm (-144 dBm, typical)			
>3 GHz to 4 GHz	-135 dBm (-140 dBm, typical)			
Preamplifier On				
10 MHz to 2.3 GHz	-155 dBm (-160 dBm, typical)			
>2.3 GHz to 3 GHz	-153 dBm (-158 dBm, typical)			
>3 GHz to 4 GHz	-150 dBm (-156 dBm, typical)			
Display Range				
Log scale and units (10 divisions displayed)	1 to 20 dB/division in 1 dB steps dBm, dBV, dBmV, dBµV			
Linear scale and units (10 divisions displayed)	V, mV, mW, W			
Detectors	Normal, positive peak, sample, negative peak, RMS			
Number of traces	6			
Trace functions	Clear/write, maximum hold, minimum hold, capture, load view on/off, trace math			
Total Absolute Amplitude Accuracy				
Preamplifier off, power level >-50 dBm, auto-coupled (20 to 30°C)				
5 MHz to 4 GHz	±1.25 dB, ±0.5 dB (typical)	Attenuation <40 dB		
	±1.55 dB, ±1.0 dB (typical)	Attenuation ≥40 dB		
Reference Level				
Setting range	-120 to +100 dBm			
Setting Resolution				
Log scale	0.1 dB			
Linear scale	1% of reference level			
Markers				
Marker types	Normal, delta, delta pair, noise, frequency count marker			
Number of markers	6			
Marker functions	Peak, next peak, next peak left, next peak right, minimum search marker to center/start/stop, always peak on/off			
RF Input VSWR				
20 MHz to 4 GHz	1.5:1 (typical)			
Second Harmonic Distortion				
Mixer level	-25 dBm			
10 MHz to 1.3 GHz	<-65 dBc (typical)			
>1.3 GHz to 4 GHz	<-70 dBc (typical)			
Third-Order Inter-Modulation (third-order intercept: TOI)				
200 MHz to 2 GHz	+10 dBm (typical)			
>2 GHz to 4 GHz	+12 dBm (typical)			
Spurious				
Inherent residual response Input terminated, 0 dB attenuation, preamplifier off, RBW at 10 kHz, Sweep mode				
20 MHz to 3 GHz	-90 dBm (nominal)			
>3 GHz to 4 GHz	-85 dBm (nominal)			
Exceptions	<-70 dBm at 227.88/1791.8/2647.8/2927.3/ 3195.2/3915.1/3640 MHz			
Input-related spurious	<-67 dBc (nominal)			
Dynamic Range				
2/3 (TOI-DANL) in 1 Hz RBW	>95 dB			
Sweep Time				
Range	80 ms to 1000 s 24 µs to 200 s	Span=0Hz(zerospan)		
Accuracy	±2%	Span=0Hz(zerospan)		
Mode	Continuous, single			
Gated Sweep				
Trigger source	External, video, and GPS			
Gate length	1 µs to 100 ms			
Gate delay	0 to 100 ms			
Trigger				
Trigger source	Free run, video, external			
Trigger Delay				
Range	0 to 200 s			
Resolution	6 µs			
Measurements*				
Channel power				
Occupied bandwidth				
Spectrum emission mask				
Adjacent channel power				
Spurious emissions				
Field strength				
AM/FM audio demodulation				
Route map				
PIM detection				
Dual spectrum				

* CW signal generator (Option 003) can be set up simultaneously.

Cable and Antenna Analyzer (standard)

Frequency	
Range	5 MHz to 4 GHz
Resolution	10 kHz
Accuracy	$\pm 25 \text{ ppm} + \text{aging (20 to } 30^\circ\text{C)}$
Aging	$\pm 5 \text{ ppm}$
Data Points	
126,251,501,1001	
Measurement Speed	
1.65 ms/point (nominal)	
Measurement Accuracy	
Corrected directivity	40 dB
Reflection uncertainty	$\pm(0.3 + 20\log(1+10^{-EP/20}))$ (typical) EP = directivity – measured return loss
Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Dynamic Range	
Reflection	60 dB
Maximum Input Level	
Average continuous power	+25 dBm (nominal)
DC voltage	$\pm 50 \text{ VDC}$
Interference Immunity	
On channel	+17 dBm at >1.4 MHz from carrier frequency (nominal)
On frequency	0 dBm within $\pm 10 \text{ kHz}$ from the carrier frequency (nominal)
Measurements	
Reflection (VSWR)	
VSWR range	1 to 65
Return loss range	0 to 60 dB
Resolution	0.01
Distance to Fault (DTF)	
Vertical VSWR range	1 to 65
Vertical return loss range	1 to 60 dB
Vertical resolution	0.01
Horizontal range	0 to (# of data points – 1) x horizontal resolution Maximum = 1500 m (4921 ft)
Horizontal resolution	$(1.5 \times 10^8) \times (V_p/\Delta)$ V_p = propagation velocity Δ = stop freq – start freq (Hz)
Cable Loss (1-port)	
Range	0 to 30 dB
Resolution	0.01 dB
1-Port Phase	
Range	-180 to +180°
Resolution	0.01°
Smith Chart	
Resolution	0.01

RF Power Meter (standard)

General Parameters			
Display range	100 to +100 dBm		
Offset range	0 to 60 dB		
Resolution	0.01 dB or 0.1 xW (x = m, u, p)		
Internal RF Power Sensor			
Frequency range	10 MHz to 4 GHz		
Span	100 kHz to 100 MHz		
Dynamic range	-120 to +20 dBm		
Maximum power	+20 dBm		
Accuracy	Same as spectrum analyzer		
External RF Power Sensors			
Directional		JD731B	
Frequency range	300 MHz to 3.8 GHz	150 MHz to 3.5 GHz	
Dynamic range	0.15 to 150 W (average) 4 to 400 W (peak)	0.1 to 50 W (average) 0.1 to 50 W (peak)	
Connector type	Type-N female on both ends		
Measurement type	Forward/reverse average power, forward peak power, VSWR		
Accuracy	$\pm(4\% \text{ of reading} + 0.05 \text{ W})^{1,2}$		
Terminating		JD732B	
Frequency range	20 MHz to 3.8 GHz		
Dynamic range	-30 to +20 dBm		
Connector type	Type-N male		
Measurement type	Average	Peak	Average and peak
Accuracy	$\pm 7\%^1$		

Optical Power Meter (Standard)


Optical Power Meter		
Display range	-100 to +100 dBm	
Offset range	0 to 60 dB	
Resolution	0.01 dB or 0.1 mW	
External Optical Power Sensors		
		MP-60A
Wavelength range	780 to 1650 nm	
Max permitted input level	+10 dBm	+23 dBm
Connector type	Type-N female on both ends	
Connector input	Universal 2.5 and 1.25 mm	
Accuracy	$\pm 5\%$	

1. CW condition at $25^\circ\text{C} \pm 10^\circ\text{C}$

2. Forward power

2-Port Transmission Measurements (Option 001)

Frequency	
Frequency range	5 MHz to 4 GHz
Frequency resolution	10 kHz
Transmission uncertainty	

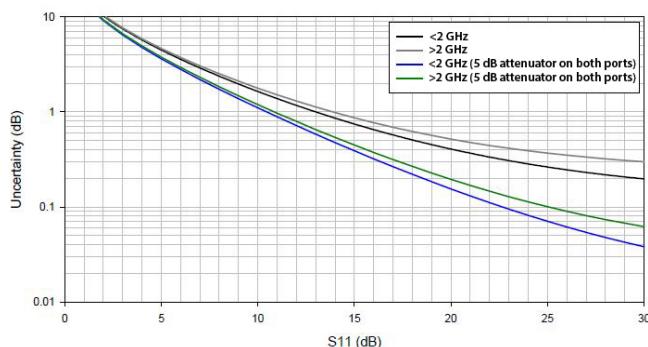

Use 5 dB attenuators on both ports to lessen uncertainty.

Output Power	
High	0 dBm (typical)
Low	-30 dBm (typical)
Measurement Speed	
Vector	2.2 ms/point (nominal)
Dynamic Range	
Vector	5 MHz to 3 GHz, 80 dB >3 GHz to 4 GHz, 75 dB
Scalar	5 MHz to 4 GHz, >100 dB
Measurements	
Insertion Loss/Gain	
Range	-120 to 100 dB
Resolution	0.01 dB
2-Port Phase	
Range	-180 to +180°
Resolution	0.01°

Bias-Tee (Option 002)

Voltage	
Voltage range	+12 to +32 V
Voltage resolution	0.1 V
Power	
8 W Max	

CW Signal Generator (Option 003)

Frequency	
Frequency range	25 MHz to 4 GHz
Frequency reference	±25 ppm Maximum
Frequency resolution	10 kHz
Output Power	
Range	0 dBm, -30 to -80 dBm
Step	1 dB
Accuracy	±1.5 dB (15 to 35°C)

GPS Receiver and Antenna (Option 010)

GPS Indicator		
Latitude, longitude, altitude		
High-Frequency Accuracy		
Spectrum, interference, and signal analyzer		
GPS lock	±25 ppb	
Hold over (for 3 days)	±50 ppb (0 to 50°C)	15 minutes after satellite locked
Connector	SMA, female	

Interference Analyzer (Option 011)

Measurements	
Spectrum analyzer	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
Spectrogram	Collect up to 72 hours of data
RSSI	Collect up to 72 hours of data
Interference finder	
Spectrum replayer	
Dual spectrogram	

Channel Scanner (Option 012)

Frequency Range	
10 MHz to 4 GHz	
Measurement Range	
110 to +20 dBm	
Measurements	
Channel scanner	1 to 20 channels
Frequency scanner	1 to 20 frequencies
Custom scanner	1 to 20 channels or frequencies

GSM/GPRS/EDGE Signal Analyzer (Options 022 and 042)

General Parameters							
Frequency range	450 MHz to 500 MHz 820 MHz to 965 MHz 1.705 GHz to 1.995 GHz						
Input signal range	–40 to +20 dBm						
Burst power	±1.0 dB						
Frequency error	±10 Hz + reference-frequency accuracy			99% confidence level			
GMSK modulation quality							
Phase RMS Accuracy							
Residual error	±1.0 degrees			(0 < Phase RMS < 8)			
Phase peak accuracy	0.7 degrees (typical)						
8PSK modulation quality	±2.0 degrees			(0 < Phase peak < 30)			
EVM Accuracy							
Residual error	±1.5%			(2% < EVM < 8%)			
RF power vs. time	2.5%						
RF power vs. time	±0.25 symbol						

Measurements**Option 022**

Channel Power	Spectrum Emission Mask	Power vs. Time (slot)	Frequency error	Auto Measure	Phase error RMS
Channel power	Reference power	Burst power	Phase error RMS	Channel power	Phase error peak
Spectral density	Peak level at defined range	Max/min point	Phase error peak	Occupied bandwidth	EVM RMS*
Peak to average power		Power vs. Time (frame)	I/Q origin offset*	Spectrum emission mask	EVM Peak*
Occupied Bandwidth	Spurious Emissions	Frame average power	TSC	Spurious emission mask	I/Q origin offset
Occupied bandwidth	Peak frequency at defined range	Burst power (Slot 0 to 7)	BSIC	Burst power	C/I*
Integrated power		TSC (Slot 0 to 7)	C/I*	PvsT – Mask	
Occupied power	Peak level at defined range	Constellation	EVM RMS*	Frame average power	
		Burst power	EVM Peak*	Frequency error	
		Modulation type	EVM 95th*		

Option 042

Channel/Frequency Scanner	Group (traffic, control)	Multipath Profile	Modulation Analyzer	Frame average power	Burst power
	BSIC (NCC, BCC)	(10 strongest)	Frame avg power trend	BSIC, frame no. and time	Modulation type
Channels or frequencies		Frame average power	C/I trend	C/I, frequency error	
Absolute power		SNR, delay			

Longitude, latitude, and satellite in all screens

* Measurements performed for 8PSK modulation signals (edge) only.

WCDMA/HSPA+ Signal Analyzer (Options 023 and 043)

General Parameters		
Frequency range	Band 1 to 14, 19 to 22, 25, 26	
Input signal range	-40 to +20 dBm	
RF channel power accuracy	$\pm 1.0 \text{ dB}, \pm 0.7 \text{ dB}$ (typical)	
Occupied bandwidth accuracy	$\pm 100 \text{ kHz}$	
Adjacent channel leakage ratio (ACLR)	<-56 dB, $\pm 0.7 \text{ dB}$ at 5 MHz offset, <-58 dB, $\pm 0.8 \text{ dB}$ at 10 MHz offset	
WCDMA modulation	QPSK	
HSPA+ modulations	QPSK, 16 QAM, 64 QAM	
Frequency error	$\pm 10 \text{ Hz} + \text{reference-frequency accuracy}$	99% confidence level
EVM accuracy	$\pm 2.0\%$	$2\% \leq \text{EVM} \leq 20\%$
Residual EVM	2.5% (typical)	
Code domain power	$\pm 0.5 \text{ dB}$ relative power $\pm 1.5 \text{ dB}$ absolute power	Code channel power >-25 dB Code channel power >-25 dB
CPICH power accuracy	$\pm 0.8 \text{ dB}$ (typical)	

Measurements					
Option 023					
Channel Power	ACLR	Constellation	Max, avg active power	Codogram	Auto Measure
Channel power	Reference power	CPICH power	Max, avg inactive power	Code utilization	Channel power
Spectral density	Abs power at defined range	Rho, EVM	Scramble code	RCSI	Occupied bandwidth
Peak to average power	Range	Peak CDE	Relative Code Domain Error	CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Spectrum emission mask
Occupied Bandwidth	Rel power at defined range	Frequency error		PICH, P-SCH, S-SCH	ACLR
Occupied bandwidth	Range	Time offset	Abs/Rel code power	CDP Table	Multi-ACLR
Integrated power	Multi-ACLR	Carrier feed-through	Code error	Reference power	Spurious emission mask
Occupied power	Lowest reference power	Scramble code	Individual code EVM, RCDE, and its constellation	Code utilization	Frequency error
Spectrum Emission Mask	Highest reference power	Code Domain Power		Code, spreading factor	EVM
Reference power	Abs power at defined range	Abs/Rel code power		Allocation (channel type)	Peak CDE
Peak level at defined range	Range	Individual code EVM and its constellation	Channel power	EVM, modulation type	Carrier feed-through
	Rel power at defined range	Channel power	Power bar graph (Abs/Rel/Delta power) CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Power bar graph (Abs/Rel/Delta power)	CPICH absolute power
	Peak frequency at defined range	Power bar graph (Abs/Rel/Delta power) CPICH, P-CCPCH, S-CCPCH			CPICH relative power
	Peak level at defined range	PICH, P-SCH, S-SCH			Max inactive power
					Scramble code
					Power Statistics CCDF

Option 043					
Channel Scanner (up to 6)	Scramble Scanner (up to 6)	Multipath Profile	Code Domain Power	Max, avg active power	Amplifier capacity
Frequencies or channels	Channel power	Ec/Io, delay	Abs/Rel code power	Max, avg inactive power	Peak amplifier capacity
Channel power, scramble code, CPICH power, Ec/Io	CPICH dominance		Individual code EVM	Frequency error	Average amplifier capacity
	Scramble code		Channel power	Time offset, Rho	
	Ec/Io, CPICH power, delay		Scramble code	Carrier feed-through	Code, peak utilization
			CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	(Composite) EVM	Average utilization
				CPICH EVM, P-CCPCH	Route Map
				EVM	

Longitude, latitude, and satellite in all screens

cdmaOne/cdma2000® Signal Analyzer (Options 020 and 040)

General Parameters		
Frequency range	Band 0 to 10	
Input signal level	–40 to +20 dBm	
RF channel power accuracy	±1.0 dB (typical)	
CDMA compatibility	cdmaOne and cdma2000	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Rho accuracy	±0.005	0.9 < Rho < 1.0
Residual Rho	>0.995 (typical)	
PN offset	1 x 64 chips	
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >–25 dB Code channel power >–25 dB
Pilot power accuracy	±1.0 dB (typical)	
Time offset	±1.0 µs, ±0.5 µs (typical)	External trigger

Measurements**Option 020**

Channel Power	ACPR	Spurious Emissions	Code Domain Power	RCSI	Auto Measure
Channel power	Reference power	Peak freq at defined range	Abs/Rel code power	Pilot, Paging, Sync, Q-Paging	Channel power
Spectral density	Abs power at defined range	Peak level at defined range	Channel power		Occupied bandwidth
Peak to average power	Rel power at defined range	Constellation	Power bar graph (Abs/Rel)	CDP Table	Spectrum emission mask
Occupied Bandwidth		Pilot power	Pilot, Paging, Sync, Q-Paging	Reference power	ACPR
Occupied bandwidth		Rho	Code utilization		Multi-ACPR
Integrated power	Multi-ACPR	EVM	Max, avg active power	Code, spreading factor	Rho
Occupied power	Lowest reference power	Frequency error	Max, avg inactive power	Allocation (channel type)	Frequency error
Spectrum Emission Mask	Highest reference power	Time offset	PN offset	Relative, absolute power	Time offset
Reference power	Abs power at defined range	Carrier feed-through	Codogram		Carrier feed-through
Peak level at defined range		PN offset	Code utilization		Pilot power
	Rel power at defined range				Max inactive power
					PN offset
					Power Statistics CCDF

Option 040

Channel Scanner (up to 6)	PN Scanner (up to 6)	Multipath Profile	Code Domain Power	Frequency error	Code utilization
	Channel power	Channel power	Abs/Rel code power	Time offset, Rho, EVM	Peak utilization
Frequencies or channels	Pilot dominance	Multipath power	Channel power	Carrier feed-through	Average utilization
Channel power, PN offset	PN offset	Ec/Io, delay	PN offset	Amplifier capacity	Route Map
Pilot power, Ec/Io	Ec/Io, pilot power, delay		Pilot, Paging, Sync, Q-Paging power	Peak amplifier capacity	Pilot power
				Average amplifier capacity	Ec/Io
			Max, avg active power		
			Max, avg inactive power		

Longitude, latitude, and satellite in all screens

EV-DO Signal Analyzer (Options 021 and 041)

General Parameters		
Frequency range	Band 0 to 10	
Input signal level	–40 to +20 dBm	
RF channel power accuracy	±1.0 dB (typical)	
EV-DO compatibility	Rev 0, Rev A and Rev B	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Rho accuracy	±0.005	0.9 < Rho < 1.0
Residual Rho	>0.995 (typical)	
PN offset	1 x 64 chips	
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >–25 dB Code channel power >–25 dB
Pilot power accuracy	±1.0 dB (typical)	
Time offset	±1.0 µs, ±0.5 µs (typical)	External trigger

Measurements**Option 021**

Channel Power	ACPR	Power vs. Time (idle and active slot)	Constellation (pilot, MAC 64/128, and data)	Code Domain Power (data)	Auto Measure
Channel power	Reference power				Channel power
Spectral density	Abs power at defined range	Slot average power	Channel power	Data channel power	Occupied bandwidth
Peak to average power		On/off ratio	Rho, EVM, peak CDE	Slot average power	Spectrum emission mask
Occupied Bandwidth	Rel power at defined range	Idle activity	Frequency error	Max, avg active power	ACPR
Occupied bandwidth		Pilot, MAC, data power	Time offset	Max, avg inactive power	Multi-ACPR
Integrated power	Multi-ACPR		Carrier feed-through	PN offset	Pilot, MAC, data power
Occupied power	Lowest reference power		PN offset	MAC Codogram	On/off ratio
Spectrum Emission Mask	Highest reference power	Channel power	Modulation type*	Code utilization	PvST mask (idle slot) or PvST mask (active slot)
	Abs power at defined range	Rho, EVM, Peak CDE	Code Domain Power (pilot and MAC 64/128)	RCSI	
Reference power		Frequency error		Slot, pilot, MAC, data	Frequency error
Peak level at defined range	Rel power at defined range	Time offset	Pilot/MAC channel power	MAC CDP Table	Time offset
		Carrier feed-through	Slot average power	Reference power	Carrier feed-through
Spurious Emissions		PN offset	Max active I/Q power	Code utilization	Pilot, MAC, data Rho
	Peak frequency at defined range	Pilot, MAC, data power	Avg active I/Q power	Code, spreading factor	Max inactive I/Q power
		Pilot, MAC, data EVM	Max inactive I/Q power	Allocation (channel type)	PN offset
	Peak level at defined range		Avg inactive I/Q power	Relative, absolute power	Power Statistics CCDF
			PN offset		

Option 041

Channel Scanner (up to 6)	PN Scanner (up to 6)	Multipath Profile	Code Domain Power	Frequency error	Peak utilization
	Channel power	Channel power	Slot average power	Time offset	Average utilization
Frequencies or channels	Pilot dominance	Multipath power	PN offset	Carrier feed-through	Route Map
PN offset	PN offset	Ec/Io, delay	Pilot, MAC, data power	Max active I/Q power	Pilot power
Pilot, MAC, data power	Ec/Io, pilot power, delay		Pilot, MAC, data Rho	Avg active I/Q power	Ec/Io
			(Composite) EVM	Code utilization	

Longitude, latitude, and satellite in all screens

*Measurement is performed in Data Constellation only.

TD-SCDMA Signal Analyzer (Options 025 and 045)

General Parameters		
Frequency range	1.785 GHz to 2.22 GHz	
Input signal level	-40 to +25 dBm	
Channel power (RRC) accuracy	±1.0 dB (typical)	
Modulations	QPSK, 8 PSK, 16 QAM, 64 QAM	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	P-CCPCH slot and 1 channel
Time error (Tau)	±1.0 µs (typical)	External trigger
Spreading factor	Auto (DL, UL), 1, 2, 4, 8, 16	

Measurements**Option 025**

Channel Power	Multi-ACLR	Power vs. Time (frame)	Midamble Power	Code Error	Auto Measure
Channel power	Lowest reference power	Slot power	Slot power	Code power and error	Channel power
Spectral density	Highest reference power	(TS [0 to 6], DwPTS, UpPTS)	DwPTS power	Individual code EVM and its constellation	Occupied bandwidth
Peak to average power	Abs power at defined range	Data power left	Midamble power (1 to 16)		Spectrum emission mask
		(TS [0 to 6], DwPTS, UpPTS)	Code Power	Data format	ACLR
Occupied bandwidth	Rel power at defined range	Midamble Power	Abs/Rel code power	Slot, DwPTS power	Multi-ACLR
Integrated power		(TS [0 to 6], DwPTS, UpPTS)	Individual code EVM and its constellation	No. of active code	Slot power
Occupied power	Spurious Emissions	Data power right		Scramble code	DwPTS power
Spectrum Emission Mask	Peak frequency at defined range	(TS [0 to 6], DwPTS, UpPTS)	Data format	Max active code power	UpPTS power
Reference power		Time offset	Slot power, DwPTS power	Avg active code power	On/off slot ratio
Peak level at defined range	Peak level at defined range	(TS [0 to 6], DwPTS, UpPTS)	No. of active code	Max inactive code power	Frequency error
ACLR		Power vs. Time (mask)	Scramble code	Avg inactive code power	EVM RMS
Reference power	Power vs. Time (slot)	Slot power	Max active code power	Peak CDE and peak active CDE	Peak CDE
Abs power at defined range	Slot power	On/off slot ratio	Avg active code power		Max inactive power
	DwPTS power	Off power	Max inactive code power		Scramble code
Rel power at defined range	UpPTS power	Timogram	Avg inactive code power		
	On/off slot ratio	Constellation			
	Slot PAR	Rho			
	DwPTS code	EVM RMS, EVM peak			
		Peak CDE			
		Frequency error			
		I/Q origin offset			
		Time offset			

Option 045

Sync-DL ID Scanner (32)	Sync-DL ID vs. Tau (up to 6)	Sync-DL ID Multipath	Sync-DL ID Analyzer	Pilot dominance	Route Map
Scramble code group		Ec/Io, Tau	DwPTS power, Ec/Io trend	EVM, frequency error	DwPTS Power
Ec/Io, Tau	ID, power, Ec/Io, Tau	DwPTS power	DwPTS power	Ec/Io, CINR	
DwPTS power	DwPTS power	Pilot dominance			
Pilot dominance	Pilot dominance				

Longitude, latitude, and satellite in all screens

Mobile WiMAX Signal Analyzer (Options 026 and 046)

General Parameters												
Frequency range	2.1 GHz to 2.7 GHz 3.4 GHz to 3.85 GHz											
Input signal level	–40 to +20 dBm											
Channel power accuracy	±1.0 dB (typical)											
Supported bandwidth	7 MHz, 8.75 MHz, and 10 MHz											
Frequency error	±10 Hz + reference-frequency accuracy			99% confidence level								
Residual EVM (RMS)	1.5% (typical)											
Measurements												
Option 026												
Channel Power	Spurious Emissions	Constellation	EVM vs. Subcarrier	Auto Measure	Time offset							
Channel power	Peak frequency at defined range	Channel power	RCE RMS, RCE peak	Channel power	I/Q origin offset							
Spectral density		RCE RMS, RCE peak	EVM RMS, EVM peak	Occupied bandwidth	Spectral flatness							
Peak to average power	Peak level at defined range	EVM RMS, EVM peak	Segment ID, cell ID	Spectrum emission mask	Frequency error							
Occupied Bandwidth	Power vs. Time (frame)	Frequency error	Preamble index	Spurious emission mask	RCE RMS							
Occupied bandwidth	Channel power	Time offset	EVM vs. Symbol	Preamble power	RCE peak							
Integrated power	Frame average power	Segment ID, cell ID	RCE RMS, RCE peak	DL burst power	EVM RMS							
Occupied power	Preamble power	Preamble index	EVM RMS, EVM peak	UL burst power	EVM peak							
Spectrum Emission Mask	DL burst power	Spectral Flatness	Segment ID, cell ID	Frame average power	Power Statistics CCDF							
Reference power	UL burst power	Average subcarrier power	Preamble index									
Peak level at defined range	I/Q origin offset	Subcarrier power variation										
	Time offset											
		Max, min, avg power										
Option 046												
Preamble Scanner (up to 6)	Multipath Profile	Preamble Power Trend	Frame avg power	Preamble	Route Map							
Total preamble power	Total preamble power	Relative power trend	Relative power	Cell ID, sector ID	Preamble power							
Total preamble power	Multipath power	Preamble power	C/I	Time offset								
Preamble, relative power	Relative power, delay											
Cell ID, sector ID	Preamble power trend											
Time offset												

Longitude, latitude, and satellite in all screens

LTE/LTE-Advanced—FDD Signal Analyzer (Options 028/030 and 048)

General Parameters		
Frequency range	Band 1 to 14, 17 to 26	
Input signal level	–40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidths	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM

Measurements		
---------------------	--	--

Option 028/030

Channel Power	Power vs. Time (frame)	Control Channel	Data EVM RMS, peak	Antenna 1 RS power and EVM	PDSCH/Data* 64 QAM EVM
Channel power	Frame average power	(P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	RS EVM RMS, peak	Antenna 2 RS power and EVM**	Data EVM RMS, peak RS, P-SS, S-SS EVM
Spectral density	Subframe power		Cell, group, sector ID		
Peak to average power	First slot power		Frame		
Occupied Bandwidth	Second slot power	MBSFN*	MBSFN*	Antenna 3 RS power and EVM**	RS, P-SS, S-SS power
Occupied bandwidth	Cell ID, I/Q origin offset	EVM, relative or absolute power, modulation type	Frame summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCDH/Data* 16 QAM, PDSCH/Data* 64 QAM)	PBCH power	
Integrated power	Time offset		Data allocation vs frame	Subframe power	
Occupied power	Constellation	Each control channels'	Resource block power	OFDM power	
Spectrum Emission Mask	MBSFN*	I/Q diagram	OFDM symbol power	Time error	
	RSTX power	Modulation format	Data utilization	I/Q origin offset	
Reference power	PDSCH/Data* QPSK EVM	Frequency error	Carrier Aggregation**		
Peak level at defined range	PDSCH/Data* 16 QAM EVM	I/Q origin offset	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Component carriers: up to 5
ACLR	PDSCH/Data* 64 QAM EVM	EVM RMS, EVM peak			
Reference power	Data EVM RMS	Subframe	Frame average power	Data utilization	Subframe power
Abs power at defined range	Data EVM peak	MBSFN*	OFDM symbol power	Auto Measure	P-SS, S-SS, PBCH, RS power and EVM
	Frequency error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* QPSK, PDSCDH/Data* 16 QAM, PDSCH/Data* 64 QAM)	Frequency error	Channel power	
Rel power at defined range	Time error	I/Q origin offset	Occupied bandwidth	Spectrum emission mask	PDSCH/Data* QPSK power and EVM
Multi-ACLR	Data Channel		EVM RMS, peak		
Lowest reference power	MBSFN*	Data EVM RMS, peak	ACLR	PDSCH/Data* 16 QAM power and EVM	
Highest reference power	Resource block power		Cell, group, sector ID		
Abs power at defined range	I/Q diagram	EVM, relative or absolute power, modulation type	Time Alignment Error	PDSCH/Data* 64 QAM power and EVM	
Rel power at defined range	RB power		Spurious emission mask		
Rel power at defined range	Modulation format	Time alignment error trend	Frame average power	Cell ID	
Spurious Emissions	I/Q origin offset		Time alignment error		
Peak frequency at defined range	EVM RMS, EVM peak	OFDM symbol power	Frequency error	Frequency error	
		Frequency, time error	RS power difference	MBSFN*	Time alignment error
Peak level at defined range		Antenna 0 RS power and EVM	Antenna 0 RS power and EVM	PDSCH/Data* QPSK EVM	Antenna port
			PDSCH/Data* 16 QAM EVM	Power Statistics CCDF	

Option 048

Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control channel table	PMCH subframe power*	Route Map
Frequency or channels	RSRP/RSRQ dominance	Cell, group, sector ID	(P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RSRP
Cell, group, sector ID	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay		Time offset	RSRQ
Channel power	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay		Datagram	RS-SINR
RSRP/RSRQ	Cell, group, sector ID	Ant 2 RS Ec/Io**, delay**	Absolute power	Datagram	S-SS RSSI
RS-SINR	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**	Relative power	Resource block power	P-SS/S-SS Power
Antenna port	RS-SINR/S-SS RSSI	Control Channel	EVM RSM, phase	Data utilization	S-SS Ec/Io
	P-SS/S-SS Power	RS power trend	Frequency error		
	S-SS Ec/Io	Cell, group, sector ID			

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 030 is enabled.

LTE/LTE-Advanced—TDD Signal Analyzer (Options 029/031 and 049)

General Parameters		
Frequency range	Band 33 to 43	
Input signal level	–40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM

Measurements			Option 029/031		
Channel Power	Spurious Emissions	Data EVM peak	Subframe	Antenna 3 RS power and EVM**	PDSCH/Data* 64 QAM EVM
Channel power	Peak frequency at defined range	Frequency error	MBSFN*	Cell, group, sector ID	Data EVM RMS, peak
Spectral density		Time error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data* 16 QPSK, PDSCH/Data* 64 QAM, PDSCH/Data* 64 QAM)	Data Allocation Map	RS, P-SS, S-SS EVM
Peak to average power	Peak level at defined range	Data Channel		Data allocation vs frame	RS, P-SS, S-SS power
Occupied Bandwidth		MBSFN*		Resource block power	PBCH power
Occupied bandwidth	Power vs. Time (frame)	Resource block power		OFDM symbol power	Subframe power
Integrated power	Frame average power	I/Q diagram		Data utilization	OFDM power
Occupied power	Subframe power	RB power			
Spectrum Emission Mask	First slot power	Modulation format	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Time error
Reference power	Second slot power	I/Q origin offset			I/Q origin offset
Peak level at defined range	Cell ID, I/Q origin offset	EVM RMS, EVM peak	Subframe power	Resource block power	Carrier Aggregation**
	Time offset	Control Channel	OFDM symbol power	Data utilization	Component carriers: up to 5
ACLR	Power vs. Time (slot)	Control channel summary (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	Frequency, time error	Auto Measure	
Reference power	Slot average power		Data EVM RMS, peak	Channel power	Subframe power
Abs power at defined range	Transient period length		RS EVM RMS, peak	Occupied bandwidth	P-SS, S-SS, PBCH, RS power and EVM
	Off power		Cell, group, sector ID	Spectrum emission mask	
Rel power at defined range	Constellation	EVM, relative or absolute power, modulation type	Time Alignment Error	ACLR	PDSCH/Data* QPSK power and EVM
	MBSFN*		Time alignment error trend	Mult-ACLR	
Multi-ACLR	RSTX power	Each control channels'	Time alignment error	Spurious emission mask	PDSCH/Data* 16 QAM power and EVM
Lowest reference power	PDSCH/Data* QPSK EVM	I/Q diagram	RS power difference	Slot average power	
Highest reference power	PDSCH/Data* 16 QAM EVM	Modulation format	Antenna 0 RS power and EVM	Off power	PDSCH/Data* 64 QAM power and EVM
Abs power at defined range		Frequency error		Transition period	
	PDSCH/Data* 64 QAM EVM	I/Q origin offset	Antenna 1 RS power and EVM	Time alignment error	Cell ID
Rel power at defined range		EVM RMS, EVM peak		MBSFN*	Frequency error
	Data EVM RMS		Antenna 2 RS power and EVM**	PDSCH/Data* QPSK EVM	Time alignment error
				PDSCH/Data* 16 QAM EVM	Antenna port
					Power Statistics CCDF

Option 049

Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control Channel	EVM RSM, phase	Route Map
	RSRP/RSRQ dominance	Cell, group, sector ID	RS power trend	Frequency error	RSRP
Frequency or channels	S-SS RSSI dominance	Ant 0 RS Ec/lo, delay	Cell, group, sector ID	PMCH subframe power*	RSRQ
Cell, group, sector ID	S-SS Ec/lo dominance	Ant 1 RS Ec/lo, delay	Control channel table (P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RS-SINR
Channel power	Cell, group, sector ID	Ant 2 RS Ec/lo**, delay**		Time offset	S-SS RSSI
RSRP/RSRQ	RSRP/RSRQ	Ant 3 RS Ec/lo**, delay**		Datagram	P-SS, S-SS power
RS-SINR	RS-SINR/S-SS RSSI			Datagram	S-SS Ec/lo
Antenna port	P-SS/S-SS power		Absolute power	Resource block power	
	S-SS Ec/lo		Relative power	Data utilization	

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 031 is enabled.

RFoCPRI/Interference Analyzer (Options 008, 060, 061, 062, 063, 064, and 065)

General Parameters					
Optical interface	Dual SFP/SFP+ (supports all MSA compliant SFP modules)				
Line rates	614.4 Mbps (1x), 1228.8 Mbps (2x)	Option 008 and 060			
	2457.6 Mbps (4x)	Option 008 and 061			
	3072.0 Mbps (5x)	Option 008 and 062			
	4915.2 Mbps (8x)	Option 008 and 063			
	6144.0 Mbps (10x)	Option 008 and 064			
	9830.4 Mbps (16x)	Option 008 and 065			
Resolution Bandwidth (RBW)					
-3 dB bandwidth	1 kHz to 10 kHz (span \leq 3.84 MHz) 1 kHz to 100 kHz (3.84 MHz < span < 30.86 MHz)	1-3-10 sequence			
Accuracy	$\pm 10\%$ (nominal)				
VBW					
-3 dB bandwidth	1 Hz to 100 KHz	1-3-10 sequence			
Accuracy	$\pm 10\%$ (nominal)				
CPRI Parameter					
IQ Sample width	4 – 20 (step 1)				
Mapping method	1 and 3				
TX clock	Internal/external/recovered				
Port type	Master/slave				
Map position	AxC#0 – AxC#7				
Bandwidth	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Measurements					
Layer-2 Monitoring		Layer-2 Term	Interference Analyzer		
Port 1	Port 2	Port 1 or 2 (exclusive)			
LOS	LOS	LOS	Spectrum Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder		
LOF	LOF	LOF RAI			
SDI	SDI	Optic RX level	dBm		
RAI	RAI	Protocol version			
Optic RX level	Optic RX level	C and M HDLC rate (kbps)	No HDLC, 240, 480, 960, 1920, 2400		
SFP Information	SFP Information				
Wavelength	Wavelength	C and M Ethernet subchannel number	20 to 63		
Vendor	Vendor				
Vendor PN	Vendor PN	Alarm Injection			
Vendor rev	Vendor rev	R-LOS	Multi carrier		
Power level type	Power level type	R-LOF			
Diagnostic byte	Diagnostic byte	Error Injection			
Nominal rate	Nominal rate	Code	Single/rate		
Min rate	Min rate	K30.7			
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

Bluetooth Connectivity (Option 013)

Personal area network (PAN)
File transfer profile (FTP)

General Information

Inputs and Outputs	
RF In	Spectrum analyzer Type-N, female 50Ω (nominal) >+40 dBm, ±50V DC (nominal)
Reflection/RF Out	Cable and antenna analyzer Type-N, female 50Ω (nominal) >+37 dBm, ±50V DC (nominal)
RF In	Cable and antenna analyzer Type-N, female 50Ω (nominal) >+25 dBm, ±50V DC (nominal)
External Trigger, GPS	SMA, female 50Ω (nominal)
External Ref	SMA, female 50Ω (nominal) 10 MHz, 13 MHz, 15 MHz -5 to +5 dBm
USB	Type A, 1 port Type B, 1 port
SFP Cage	RFoFiber (with option 008) SFP/SFP+ compatible
LAN	RJ45, 10/100Base-T
Audio jack	3.5 mm headphone jack
External power	5.5 mm barrel connector
Speaker	Built-in speaker
Display	
Type	Resistive touch screen
Size	8 inch, LED backlight, transreflective LCD with anti-glare coating
Power	
External DC input	18 to 19V DC
Power consumption	42W 54W maximum (when charging battery)

Battery

Type	10.8V, 7800 mA/hr (Lithium ion)
Operating time	>3 hr (typical at spectrum analyzer)
Charge time	3 hr (while not operating) 9 hr (while operating)
Charging temperature	0 to 45°C (32 to 104°F) ≤85% RH
Discharging temperature	-20 to 55°C (4 to 131°F) ≤85% RH
Storage temperature ³	0 to 25°C (32 to 77°F)

Data Storage

Internal ⁴	Maximum 512 MB
External ⁵	Limited by size of USB flash drive

Environmental

Operating Temperature	
AC power	0 to 40°C (32 to 104°F) with no derating
Battery	0 to 40°C (32 to 104°F) at charging -10 to 55°C (14 to 131°F) at discharging -10 to 50°C (14 to 122°F) at discharging with Option 008
Maximum humidity	95% RH (noncondensing)
Shock and vibration	MIL-PRF-28800F class 2
Storage temperature ⁶	-30 to 71°C (-22 to 160°F)

EMC

IEC/EN 61326-1:2013 (complies with European EMC)
CISPR11:2009+A1:2010

ESD

IEC/EN 61000-4-2

Size and Weight (standard configuration)

Weight (with battery)	Standard	4.17 kg (9.19 lb)
	Fully loaded	4.34 kg (9.57 lb)

Size (WxHxD)

295 x 195 x 82 mm

Warranty

2 years

Calibration Cycle

1 year

- Connects flash drive, power sensor, EZ-Cal kit, and fiber microscope.
- Connects to PC for data transfer.
- 20 to 85% RH, store battery pack in low-humidity environment; extended exposure to temperature above 45°C could significantly degrade battery performance and life.
- Up to 3800 traces.
- Supports USB 2.0 compatible memory devices.
- With the battery pack removed.

Ordering Information

Description	Part Number
Standard CellAdvisor Base Station Analyzer	
100 kHz to 4 GHz spectrum analyzer	JD745B ¹
5 MHz to 4 GHz cable and antenna analyzer ¹	
10 MHz to 4 GHz RF power meter (internal mode)	
Options	
NOTE: Upgrade options for the JD745B use the designation JD745BU before the respective last three-digit option number.	
2-port transmission measurement ²	JD745B001
Bias-tee ³	JD745B002
CW signal generator	JD745B003
Optical hardware ⁴	JD745B008
GPS receiver, and antenna	JD745B010
Interference analyzer ^{6,7}	JD745B011
Channel scanner	JD745B012
Bluetooth connectivity ⁵	JD745B013
cdmaOne/cdma2000 analyzer	JD745B020
EV-DO analyzer ⁸	JD745B021
GSM/GPRS/EDGE analyzer	JD745B022
WCDMA/HSPA+ analyzer	JD745B023
TD-SCDMA analyzer	JD745B025
Mobile WiMAX analyzer	JD745B026
LTE - FDD analyzer	JD745B028
LTE - TDD analyzer	JD745B029
LTE Advanced - FDD analyzer ⁹	JD745B030
LTE Advanced - TDD analyzer ¹⁰	JD745B031
cdmaOne/cdma2000 OTA analyzer ^{7,11}	JD745B040
EV-DO OTA analyzer ^{7,11}	JD745B041
GSM/GPRS/EDGE OTA analyzer ^{7,11}	JD745B042
WCDMA/HSPA+ OTA analyzer ^{7,11}	JD745B043
TD-SCDMA OTA analyzer ^{7,11}	JD745B045
LTE — FDD OTA analyzer ^{7,11}	JD745B048
LTE — TDD OTA analyzer ^{7,11}	JD745B049
RFoCPRI 614 Mbps and 1.2 Gbps Interference analyzer ¹⁸	JD745B060
RFoCPRI 2.4 Gbps interference analyzer ¹⁸	JD745B061
RFoCPRI 3.1 Gbps interference analyzer ¹⁸	JD745B062
RFoCPRI 4.9 Gbps interference analyzer ¹⁸	JD745B063
RFoCPRI 6.1 Gbps interference analyzer ¹⁸	JD745B064
RFoCPRI 9.8 Gbps interference analyzer ¹⁸	JD745B065
Standard Accessories	
AC/DC power adapter ¹²	G700550326
Cross LAN cable (1.5 m) ¹²	G710550335
USB A to B cable (1.8 m) ¹²	GC73050515
>1 GB USB memory ¹²	GC72450518
Rechargeable lithium ion battery ¹²	G710550325
Automotive cigarette lighter 12V DC adapter ¹²	G710550323
Stylus pen ¹²	G710550316
Optional Calibration Kits	
Y-calibration kit, Type-N(m), DC to 6 GHz, 50Ω	JD78050509
Y-calibration kit DIN(m), DC to 6 GHz, 50Ω	JD78050510
Dual port Type-N 6 GHz calibration kit	JD78050507
Dual port DIN 6 GHz calibration kit	JD78050508

Description	Part Number
Optional RF Cables	
RF cable DC to 8 GHz Type-N(m) to Type-N(m), 1.0 m	G700050530
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 1.5 m	G700050531
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 3.0 m	G700050532
RF cable DC to 18 GHz Type-N(m) to SMA(m), 1.5 m	G710050533
RF cable DC to 18 GHz Type-N(m) to QMA(m), 1.5 m	G710050534
RF cable DC to 18 GHz Type-N(m) to SMB(m), 1.5 m	G710050535
RF cable DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G710050536
Phase-stable RF cable with grip DC to 6 GHz Type-N(m) to Type-N(f), 1.5 m	G700050540
Phase-stable RF cable with grip DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G700050541
Optional Omni Antennas	
RF omni antenna Type-N(m), 806 to 896 MHz	G700050353
RF omni antenna Type-N(m), 870 to 960 MHz	G700050354
RF omni antenna Type-N(m), 1710 to 2170 MHz	G700050355
RF omni antenna Type-N(m), 720 to 800 MHz	G700050356
RF omni antenna Type-N(m), 2300 to 2700 MHz	G700050357
Optional Yagi Antennas	
RF Yagi antenna Type-N(f), 1750 to 2390 MHz, 10.2 dBd ¹³	G700050363
RF Yagi antenna Type-N(f), 806 to 896 MHz, 10.2 dBd ¹³	G700050364
RF Yagi antenna Type-N(f), 866 to 960 MHz, 9.8 dBd ¹³	G700050365
RF Yagi antenna SMA(f), 700 to 4000 MHz, 1.85 dBd ¹⁴	G700050366
Optional RF Power Sensors	
Directional power sensor, peak and average power 300 to 3800 MHz	JD731B
Terminating power sensor, average power 20 to 3800 MHz	JD732B
Directional power sensor, peak and average power 150 to 3500 MHz	JD733A
Terminating power sensor, peak power 20 to 3800 MHz	JD734B
Terminating power sensor, dual (Average/Peak) power 20 to 3800 MHz	JD736B
Optional Optical Power Meters and Fiber Microscope Kits	
USB optical power meter with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-60A
USB optical power meter—high power with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-80A
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and tips	FBP-SD101
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and tips	FBP-MTS-101
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD103
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters, and cleaning materials	FIT-SD103-C
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD113

Ordering Information (continued)

Description	Part Number
Optional RF Adapters	
Adapter Type-N(m) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050571
Adapter DIN(m) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050572
Adapter Type-N(m) to SMA(f) DC to 18 GHz, 50 Ω	G700050573
Adapter Type-N(m) to BNC(f), DC to 4 GHz, 50 Ω	G700050574
Adapter Type-N(f) to Type-N(f), DC to 18 GHz 50 Ω	G700050575
Adapter Type-N(m) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050576
Adapter Type-N(f) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050577
Adapter Type-N(f) to DIN(m), DC to 7.5 GHz, 50 Ω	G700050578
Adapter DIN(f) to DIN(f), DC to 7.5 GHz, 50 Ω	G700050579
Adapter Type-N(m) to Type-N(m), DC to 11 GHz 50 Ω	G700050580
Adapter N(m) to QMA(f), DC to 6.0 GHz, 50 Ω	G700050581
Adapter N(m) to QMA(m), DC to 6.0 GHz, 50 Ω	G700050582
Optional Miscellaneous	
Soft carrying case	JD74050341
Hard carrying case	JD71050342
Hard carrying case with wheels	JD70050342
CellAdvisor backpack carrying case	JD70050343
External battery charger	G710550324
RF directional coupler, 700 to 4000 MHz, 30 dB, 50 W input/output; Type-N(m) to Type-N(f), tap off; Type-N(f)	G710050585
RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ¹⁵	G710050586
4x1 RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ¹⁶	G710050587
Attenuator 40 dB, 100 W, DC to 4 GHz (Unidirectional)	G710050581
JD700B series user's guide - printed version	JD700B362
USB Bluetooth dongle and dipole antenna 5 dBi	JD70050006
Optional SFP Transceiver	
SFP 4/2/1 G Fibre Channel and 1 G Ethernet, 850 nm, 150 – 500 m, SX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-8-1
SFP 4G/2G/1G Fibre Channel and 1 G Ethernet, 1310 nm, 5 km, LX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-3-1
SFP 4G/2G/1G Fibre Channel and 1 G Ethernet, 1310 nm, 20 km, LX 3.072/2.4/1.2 Gbps, 614 Mbps CPRI; 3.072/1.5 Gbps, 768 Mbps OBSAI	CSFP-4G-3-2
Optional SFP Transceiver	
SFP+ 8/4/2 G Fibre Channel, 6/4.9 Gbps CPRI 850 nm mm multirate 4.9/3.072/2.4 Gbps CPRI and 6/3.072 Gbps OBSAI	CSFPPLUS-8G-8-1
SFP+ 8/4/2 G Fibre Channel, 6/4.9 Gbps CPRI 1310 nm SM, 10 km 4.9/3.072/2.4 Gbps CPRI and 6/3.072 Gbps OBSAI	CSFPPLUS-8G-3-1
SFP+ 1/10 G Ethernet, 1/10 G Fiber Channel 1310 nm SM 10 km 1000BASE-LX 1G and 10GBASE-LR/LW, 1/10 G Fibre Channel and 9.8 Gbps CPRI	SFPPLUS-1GE-10GE-3-1
SFP+ 1/10 G Ethernet 1310 nm SM 10 km 1000BASE-LX 1G and 10GBASE-LR/LW, 1/10 G Fibre Channel and 9.8 Gbps CPRI	SFPPLUS-1GE-10GE-3-1
Optional StrataSync™	
StrataSync asset management annual subscription for CellAdvisor base station analyzer	StrataSync-AM-CA-BSA-1YR
StrataSync test data management annual subscription for CellAdvisor base station analyzer ¹⁷	StrataSync-TDMCA-BSA-1YR
Optional Warranty and Calibration	
Warranty extension of 1 year for Asia and North America	JD785B200
Warranty extension of 1 year for Latin America and EMEA	JD785B201
Calibration service for Asia and North America	JD785B250
Calibration service for Latin America and EMEA	JD785B251
Optional TAP	
Optical nTAP, three-channel, 50 μm, MM, LC, 50/50 split ratio	TO3-M5-LC-55-K
Optical nTAP, three-channel, 9 μm, SM, LC, 50/50 split ratio	TO3-SM-LC-55-K

1. Requires calibration kit.
2. Requires dual-port calibration kit.
3. Requires Option 001.
4. Requires SFP/SFP+ and optical cable.
5. Includes a pair of Bluetooth USB dongles with 5 dBi dipole antenna (JD70050006).
6. Recommend adding Option 010.
7. Recommend adding antennas G70005035x and/or G70005036x.
8. Requires Option 020.
9. Requires Option 028.
10. Requires Option 029.
11. Requires Option 010.
12. Standard accessory that can be purchased separately.
13. Requires RF cable G700050530.
14. Requires RF cable G710050533.
15. Recommended for LTE testing.
16. Recommended for LTE-Advanced testing.
17. Requires STRATASYNC-AM-CA-BSA-1YR.
18. Requires Option 008.



North America
Latin America
Asia Pacific
EMEA

Toll Free: 1 855 ASK-JDSU (1 855 275-5378)
Tel: +1 954 688 5660 Fax: +1 954 345 4668
Tel: +852 2892 0990 Fax: +852 2892 0770
Tel: +49 7121 86 2222 Fax: +49 7121 86 1222