

# 8100-Series OTDR EVO Modules


## For OneAdvisor 800 Fiber platform

The VIAVI Solutions® 8100-Series OTDR EVO family transforms fiber testing. Connect the OTDR EVO family anywhere on the fiber to characterize single-mode fibers for commissioning, network upgrades, and troubleshooting with the added insurance of workflow optimization and accurate fiber-link fingerprinting.

The OTDR EVO family's optical performance combined with the One Advisor 800 Fiber's ensures that testing jobs are performed right—the first time.

Standard testing features include:

- Automatic macrobend detection
- Summary results table with pass/fail analysis
- FastReport onboard report generation

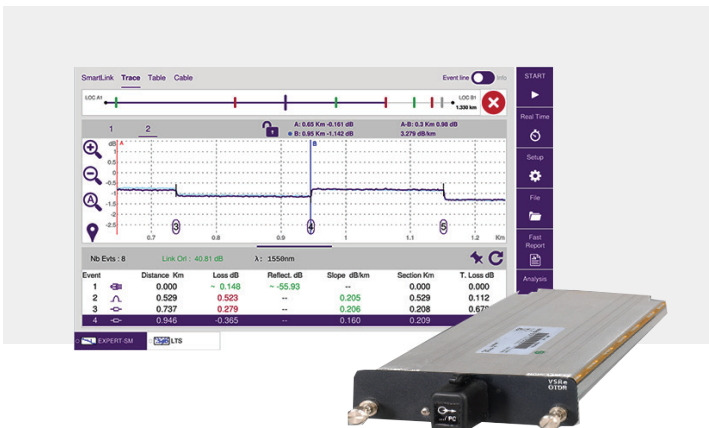

## Applications

- Access, Metro, very long-haul, and ultra-long-haul fiber network characterization
- Advanced FTTH PON network qualification and troubleshooting
- Upgrading core fiber networks up to 800G
- Remotely monitoring fiber while in or out of service
- Fiber installation/deployment certification and troubleshooting for [Submarine Cable Networks](#)

## Key Benefits

- Industry-leading dead zone performance for full element event characterization on fiber links
- Includes an integrated power meter, light source, and OTDR in a one-port tool for added flexibility
- Traffic detection avoids risking live signal interference or optical transmitter damage during an OTDR test
- Eliminates OTDR interpretation errors with Smart Link Mapper (SLM) without compromising on test time
- Reduces event loss measurement uncertainty and improves measurement repeatability

## Key Features

- Up to 50 dB dynamic range
- Integrated CW light source and broadband power meter (single-mode wavelengths)
- PON-optimized to test through a 1x128 splitter



### Specifications (Typical at 25°C)

General	
Weight	approx. 500 g (1.1 lb)
Dimensions (W x H x D)	213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)
Laser safety class (21 CFR)	Class 1
Distance units	Kilometer, meter, feet, and miles
Group index range	1.30000 to 1.70000 in 0.00001 steps
Number of data points	Up to 256,000 data points
Distance Measurements	
Mode	Automatic or dual cursor
Display range	Single-mode: 0.1 – 400 km
Display resolution	1 cm
Cursor resolution	From 1 cm
Sampling resolution	From 4 cm
Accuracy (Excluding group index uncertainties)	Single-mode: $\pm (0.75 \text{ m} + \text{sampling resolution} + 0.001\% \times \text{distance})$
Attenuation Measurements	
Mode	Automatic, manual, 2-point, 5-point, and LSA
Display resolution	0.001 dB
Linearity	Single-mode: $\pm 0.03 \text{ dB/dB}$
Threshold	0.01 to 4.99 dB in 0.01 dB steps
Reflectance/ORL Measurements	
Mode	Automatic or manual
Reflectance accuracy	$\pm 2 \text{ dB}$
Display resolution	0.01 dB
Threshold	-11 to -99 dB in 1 dB steps

OTDR Modules	8100C	8100D
Central wavelength <sup>1</sup>	1310 ±20 nm; 1550 ±20 nm; 1625 ±10 nm; 1650 +15/-5 nm	1310 ±20 nm; 1550 ±20 nm; 1625 +15/-5 nm; 1650 ±1 nm
Dynamic range <sup>2</sup>	47.5/47/47.5/46 dB	50/50/50/48 dB
Pulse width	2 ns to 20 µs	2 ns to 20 µs
Event dead zone <sup>3</sup>	0.5 m <sup>9</sup>	0.5 m
Attenuation dead zone <sup>4</sup>	2 m	2.5 m
Splitter attenuation dead zone	25 m after a 15 dB splitter loss/ 60 m after a 18 dB splitter loss	15 m after a 15 dB splitter loss
<b>Power meter</b>		
Calibrated wavelengths <sup>5</sup>	1310/1490/1550/1625 nm	1310/1490/1550/1625 nm
Power range	-3 to -55 dBm	-5 to -55 dBm
Accuracy <sup>6</sup>	±0.5 dB at -30 dBm	±0.5 dB at -30 dBm
<b>Continuous wave light source<sup>7</sup></b>		
Wavelengths	1310/1490/1550/1625 nm	1310/1550/1625 nm
Output power	-3.5 dBm	0 dBm
Stability	±0.1 dB at 25°C over 1 hour	±0.1 dB at 25°C over 1 hour
Operating modes <sup>8</sup>	CW, 270 Hz, 330 Hz, 1 kHz, 2 kHz, TWINtest	270 Hz, 330 Hz, 1 kHz, 2 kHz, TWINtest

1. Laser at 25°C and measured at 10 µs.

2. The one-way difference between the extrapolated backscattering level at the start of the fiber and the RMS (SNR=1) noise level, after 3 minutes averaging using the largest pulse width.

3. Measured at ±1.5 dB below the peak of an unsaturated reflective event using the shortest pulse width.

4. Measured ±0.5 dB from the linear regression using an FC/UPC reflectance and the shortest pulse width.

5. 1625 nm is not available on the 8138C-65 version.

6. At calibrated wavelengths.

7. At calibrated wavelengths; multimode source (850 nm) is compliant to the IEC 61280-1-4 standard related to the encircled flux.

8. Subtract 3 dB when in modulation mode (270 Hz/330 Hz/1 kHz/2 KHz).

9. Measured at 1.5 dB below the peak of an unsaturated 27 dB reflective event using the shortest pulse width.

## Ordering Information

Description	Part Number
<b>8100C Modules</b>	
1550 nm OTDR module <sup>1</sup>	E8115C
In-service 1625 nm OTDR module <sup>1</sup>	E81162C
In-service 1650 nm OTDR module <sup>1</sup>	E81165C
1310/1550 nm OTDR module	E8126C
1310/1550/1625 nm OTDR module	E8136C
<b>8100D Modules</b>	
1550 nm OTDR module <sup>1</sup>	E8115D
In-service 1625 nm OTDR module <sup>1</sup>	E81162D
In-service 1650 nm OTDR module <sup>1</sup>	E81165D
1310/1550 nm OTDR module	E8126D
1550/1625 nm OTDR module <sup>1</sup>	E8129D-62
1310/1550/1625 nm OTDR module	E8136D
<b>Universal Optical Connectors</b>	
Straight connectors	EUNIPCFC, EUNIPCSC, EUNIPCST, EUNIPCDIN
8° angled connectors	EUNIAPCFC, EUNIAPCSC, EUNIAPCDIN

1. Source and power meter not available on these versions.

For more information about the [One Advisor 800](#), refer to its respective data sheets.

VIAVI Care Support Plans

Increase your productivity for up to 5 years with optional VIAVI Care Support Plans:

- Maximize your time with on-demand training, priority technical application support and rapid service.
- Maintain your equipment for peak performance at a low, predictable cost.

Plan availability depends on product and region. Not all plans are available for each product or in every region. To find out which VIAVI Care Support Plan options are available for this product in your region, contact your local representative or visit: [viavisolutions.com/viavicareplan](https://viavisolutions.com/viavicareplan)

Features

\*5-year plans only

Plan	Objective	Technical Assistance	Factory Repair	Priority Service	Self-paced Training	5 Year Battery and Bag Coverage	Factory Calibration	Accessory Coverage	Express Loaner
 BronzeCare	Technician Efficiency	Premium	✓	✓	✓				
 SilverCare	Maintenance & Measurement Accuracy	Premium	✓	✓	✓	✓*	✓		
 MaxCare	High Availability	Premium	✓	✓	✓	✓*	✓	✓	✓



viavisolutions.com

Contact Us +1 844 GO VIAVI | (+1 844 468 4284)  
To reach the VIAVI office nearest you, visit [viavisolutions.com/contact](https://viavisolutions.com/contact)