


# VIAVI

## Infrared Short Wavepass Filters

Infrared Short Wavepass filters developed by VIAVI Solutions provide high transmission at wavelengths shorter than the cut-off wavelength, and excellent blocking at wavelengths longer than the cut-off wavelength. Filter designs can be deposited on a variety of infrared transmitting substrates. The cut-off wavelength can be located anywhere in the infrared up to approximately 16  $\mu\text{m}$ .

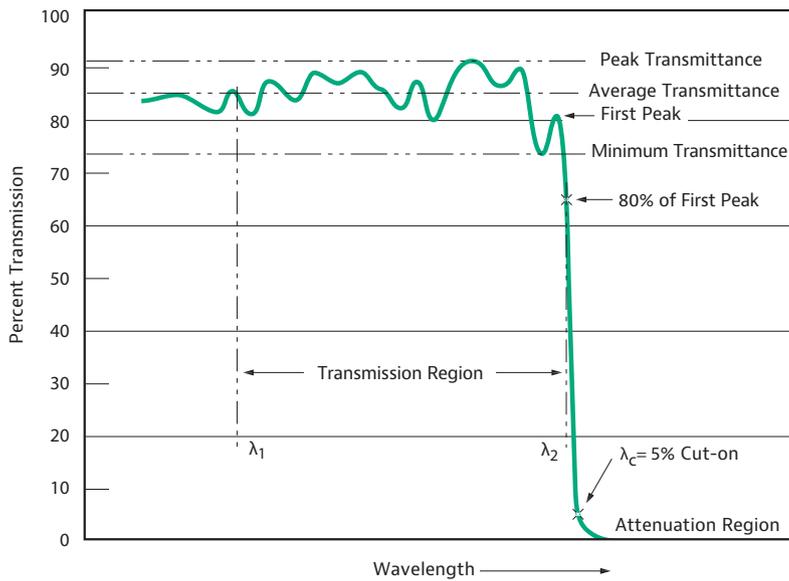

### Key Features

- Excellent coating uniformity
- Tightly toleranced precision filter expertise
- Flat spectral profile
- High peak transmission value
- Excellent blocking
- Wide range of filters and assemblies for the infrared sensing and imaging instrumentation market
- High volume capability
- Expert application engineering support
- Available filter substrates are: Si, Ge, Glass, Sapphire, Quartz, Fused Silica, ZnS, ZnSe

### Applications

- Gas monitoring
- Temperature sensing
- Thermal imaging
- Standard
- Temperature, humidity, mild abrasion, adherence: MIL-F-48616

## Spectral Characteristics

Parameter	Symbol	Conditions	Minimum	Maximum
Wavelength range <sup>1</sup>	$\lambda_c$	At 5% transmission, 25°C, 0° AOI	1 $\mu\text{m}$	16 $\mu\text{m}$
Nominal bandwidth <sup>1,2</sup>	$\lambda_2/\lambda_1$	At 25°C, 0° AOI	1.3	1.9
Cut-on/Cut-off slope <sup>1,3</sup>		At 25°C, 0° AOI	3%	6%
Absolute center wavelength drift vs temperature			0.002%/°C	0.01%/°C

## Minimum Transmission

Center Wavelength Range	Nominal Bandwidth $\lambda_1/\lambda_2$	Minimum Average Transmittance <sup>4,5</sup>	Minimum Average Transmittance <sup>4,5,6</sup>
1.5 to 3 $\mu\text{m}$	1.2	75%	65%
	1.4	75%	65%
	1.8	70%	60%
3 to 8 $\mu\text{m}$	1.2	87%	80%
	1.4	85%	75%
	1.8	85%	75%
8 to 12 $\mu\text{m}$	1.2	87%	80%
	1.4	85%	78%
	1.8	85%	75%
12 to 15 $\mu\text{m}$	1.2	80%	70%
	1.4	78%	68%
	1.8	75%	65%

## Filter Size

Type	Minimum	Maximum
Square or rectangle	2 mm	100 mm
Diameter	2 mm	150 mm
Thickness	0.3 mm	—
Thickness tolerance <sup>7</sup>	$\pm 0.025$ mm	—

<sup>1</sup>AOI: angle of incidence.

<sup>2</sup> $\lambda_1$  is defined as  $\lambda_c + (3\% \text{ to } 6\% \text{ of } \lambda_c)$ .

<sup>3</sup>Cut-on/cut-off slopes  $\geq 4\%$  are for standard designs and are consistent with standard production yields.

<sup>4</sup>All peak transmission values are minimal and consistent with standard production yields.

<sup>5</sup>All transmission values are for filters attenuated above the cut-off wavelength to  $1.4 \lambda_c$  to  $T \leq 0.1\%$  average.

<sup>6</sup>Minimum Absolute Transmission is the value below which transmission will not fall for any wavelength in the wavelength region defined by  $\lambda_2/\lambda_1$ .

<sup>7</sup>Thickness tolerance for standard design is  $\pm 0.1$  mm.



Americas +1 800 254 3684  
 Europe +33 1 30 81 50 41  
 Asia Pacific +86 512 6956 7895  
 E-mail [ospcustomerservice@viavisolutions.com](mailto:ospcustomerservice@viavisolutions.com)

© 2021 VIAVI Solutions Inc.  
 Product specifications and descriptions in this document are subject to change without notice. Patented as described at [viavisolutions.com/patents](http://viavisolutions.com/patents)  
 irswp-ds-co-ae  
 30137512 902 0113