



**1** Wire the DC power cable to the vehicle power source and then connect it to the back of the Seeker X Mobile Mount.

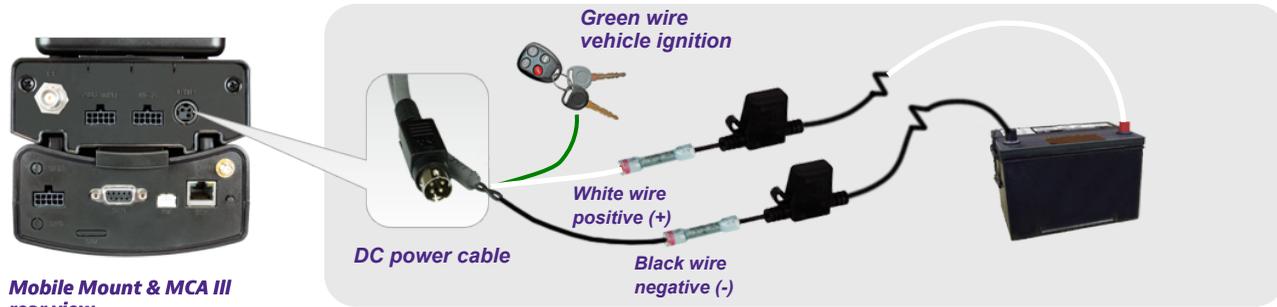


*\*Use the provided in-line fuse holders to wire the white & black DC power cables to the vehicle battery as shown. Wire the green DC power cable to the vehicle key switch to allow the MCA III to determine when the vehicle is turned OFF.*

**2** Install the Seeker X Mobile Mount & Seeker MCA III in your vehicle\*.

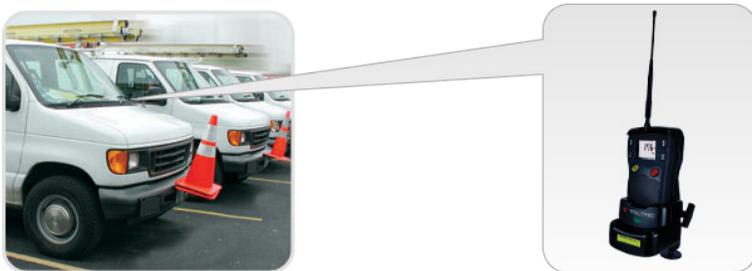


*\*Before installation, configure the Seeker X & Seeker MCA III as shown in the Seeker Setup User's Guide.*

**3** Connect the serial data cable between the Seeker X Mobile Mount and the Seeker MCA III (optional).

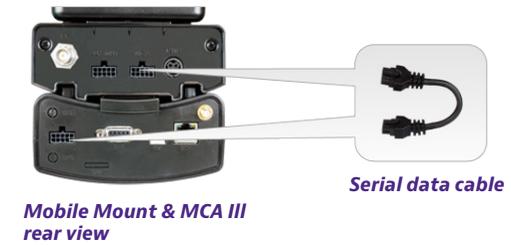

**4** Connect the Seeker X Mobile Mount antenna connection to the vehicle antennas.

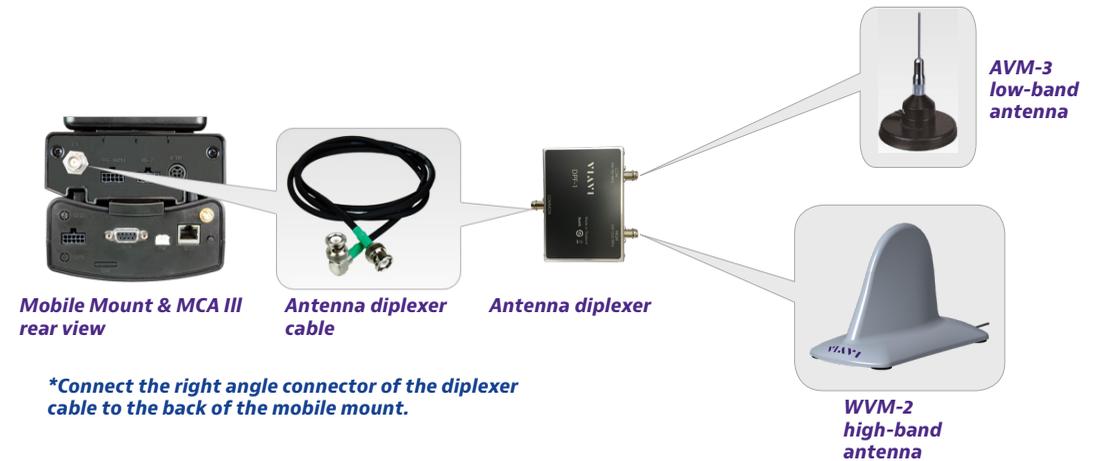

*\*Connect the right angle connector of the diplexer cable to the back of the mobile mount.*

5

Connect the GPS receiver and Ethernet cable to the Seeker MCA III (optional).




**Technical assistance**

If you require technical assistance, call 1-844-GO-VIAVI / 1.844.468.4284.

For the latest TAC information, visit <http://www.viavisolutions.com/en/services-and-support/support/technical-assistance>

6

Connect the Wi-Fi antenna to the Seeker MCA III.

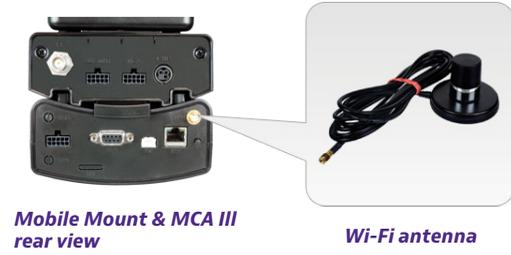

**VIAVI Solutions**

**North America**

**1.844.GO VIAVI / 1.844.468.4284**

**Latin America**

**+52 55 5543 6644**

**EMEA**

**+49 7121 862273**

**APAC**

**+1 512 201 6534**

**All Other Regions**

**viavisolutions.com/contacts**

**email**

**Trilithic.support@viavisolutions.com**